

EEGGV4Q4Q465DR10



32-port sector antenna, 4 x 694-862 MHz (R1,R3), 4 x 880-960 MHz (R2,R4), and 8 x 1695-2690 MHz (Y1-Y4) 65° HPBW, 16 x 2300-3800 MHz (P1,P2), 90° HPBW, 10 x RET

- Two broadband beamforming arrays for 2300-2690 MHz or 3300-3800 MHz, each with a calibration port
- Design for site sharing for both FDD and TDD applications
- New aerodynamic endcaps for wind load optimization
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios

General Specifications

Antenna Type	Sector- and beamforming
Band	Multiband
Calibration Connector Interface	MQ5
Calibration Connector Quantity	2
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female MQ4 MQ5
RF Connector Location	Bottom
RF Connector Quantity, high band	16
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	8
RF Connector Quantity, total	32

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc


EEGGV4Q4Q465DR10

Internal RET	High band (2) Low band (4) Mid band (4)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2688 mm 105.827 in
Net Weight, antenna only	74.3 kg 163.803 lb

Array Layout

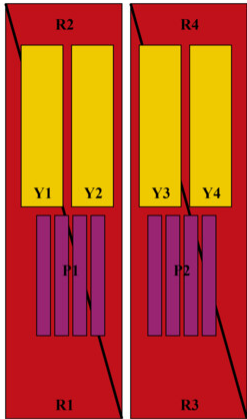

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
R1	694-862	1 - 2	1	AISG2	CPxxxxxxxxxxxxR1
R2	880-960	3 - 4	2	AISG1	CPxxxxxxxxxxxxR2
R3	694-862	5 - 6	3	AISG2	CPxxxxxxxxxxxxR3
R4	880-960	7 - 8	4	AISG1	CPxxxxxxxxxxxxR4
Y1	1695-2690	9 - 10	5	AISG2	CPxxxxxxxxxxxxY1
Y2	1695-2690	11 - 12	6	AISG2	CPxxxxxxxxxxxxY2
Y3	1695-2690	13 - 14	7	AISG1	CPxxxxxxxxxxxxY3
Y4	1695-2690	15 - 16	8	AISG1	CPxxxxxxxxxxxxY4
P1	2300-3800	17 - 24	9	AISG2	CPxxxxxxxxxxxxP1
P2	2300-3800	25 - 32	10	AISG1	CPxxxxxxxxxxxxP2

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



EEGGV4Q4Q465DR10

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz 2300 – 3800 MHz 694 – 862 MHz 880 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,600 W @ 50 °C

Electrical Specifications

	R1,R3	R2,R4	Y1-Y4	Y1-Y4	Y1-Y4	P1,P2	P1,P2
Frequency Band, MHz	694–862	880–960	1695–1920	1920–2200	2300–2690	2300–2690	3300–3800
RF Port	1,2,5,6	3,4,7,8	9-16	9-16	9-16	17-32	17-32
Gain at Mid Tilt, dBi	15.2	15.4	16.3	17.6	17.9	14.7	15.8
Beamwidth, Horizontal, degrees	62	60	71	62	58	92	69
Beamwidth, Vertical, degrees	8.8	7.6	6.3	5.6	4.8	5.9	5.5
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	19	19	18	18	21	11	14
Front-to-Back Ratio at 180°, dB	29	29	33	32	32	28	29
Front-to-Back Total Power at 180° ± 30°, dB	21	22	26	27	27	20	21
Coupling level, Amp, Antenna port to Cal port, dB						-26	-26
Coupling level, max Amp Δ, Antenna port to Cal port, dB						±2	±2
Coupler, max Amp Δ, Antenna port to Cal port, dB						0.9	0.9
Coupler, max Phase Δ, Antenna port to Cal port, degrees						7	7
Isolation, Cross Polarization, dB	28	28	25	25	25	23	23
Isolation, Inter-band, dB	28	28	25	25	25	25	25
Isolation, Co-polarization, dB						18	18
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-130	-130
Input Power per Port at 50°C, maximum, watts	250	250	250	250	200	75	75

EEGGV4Q4Q465DR10

Electrical Specifications, BASTA

Frequency Band, MHz	694–862	880–960	1695–1920	1920–2200	2300–2690	2300–2690	3300–3800
Gain by all Beam Tilts, average, dBi	15.1	15.3	16.2	17.4	17.8	14.6	15.6
Gain by all Beam Tilts Tolerance, dB	±0.5	±0.4	±0.8	±0.7	±0.6	±1.4	±0.6
Beamwidth, Horizontal Tolerance, degrees	±6	±5	±7	±7	±4	±18	±15
Beamwidth, Vertical Tolerance, degrees	±0.8	±0.4	±0.4	±0.5	±0.3	±0.5	±0.3
USLS, beampeak to 20° above beampeak, dB	18	17	16	17	18	11	13
CPR at Boresight, dB	22	22	23	24	21	14	17
CPR at Sector, dB	9	11	5	5	5	8	5

Electrical Specifications, Broadcast 65°

Frequency Band, MHz	2300–2690	3300–3800
Gain, dBi	17.5	17.1
Beamwidth, Horizontal, degrees	65	65
Beamwidth, Horizontal at 10 dB, degrees	114	112
Beamwidth, Vertical, degrees	5.9	5.5
Front-to-Back Total Power at 180° ± 30°, dB	24	24
USLS (First Lobe), dB	12	14

Electrical Specifications, Envelope Pattern

Frequency Band, MHz	2300–2690	3300–3800
Gain, dBi	20.2	21.3
Beamwidth, Horizontal at 10 dB, degrees	126	121
Beamwidth, Vertical at 3 dB, degrees	5.9	5.5
Front-to-Back Total Power at 180° ± 30°, dB	25	25
USLS (First Lobe), dB	12	15

Electrical Specifications, Service Beam

EEGGV4Q4Q465DR10

Frequency Band, MHz	2300–2690	3300–3800
Steered 0° Gain, dBi	20.2	21.4
Steered 0° Beamwidth, Horizontal, degrees	26	18
Steered 0° Front-to-Back Total Power at 180° ± 30°, dB	27	29
Steered 0° Horizontal Sidelobe, dB	12	10
Steered 30° Gain, dBi	19.4	19.5
Steered 30° Beamwidth, Horizontal, degrees	28	21
Steered 30° Front-to-Back Total Power at 180° ± 30°, dB	26	25

Electrical Specifications, Soft Split

Frequency Band, MHz	2300–2690
Gain, dBi	19.2
Beamwidth, Horizontal, degrees	32
Front-to-Back Total Power at 180° ± 30°, dB	27
Horizontal Sidelobe, dB	15

Mechanical Specifications

Wind Loading @ Velocity, frontal	970.0 N @ 150 km/h (218.1 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	304.0 N @ 150 km/h (68.3 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,162.0 N @ 150 km/h (261.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	667.0 N @ 150 km/h (149.9 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	318 mm 12.52 in
Length, packed	2809 mm 110.591 in
Weight, gross	95.8 kg 211.203 lb

Regulatory Compliance/Certifications

Agency	Classification
--------	----------------

EEGGV4Q4Q465DR10

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

UK-ROHS

Compliant/Exempted

Included Products

- BSAMNT-4 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
- BSAMNT-M4 – Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

* Footnotes

Performance Note

Severe environmental conditions may degrade optimum performance

BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.5 kg | 14.33 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



BSAMNT-M4



Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 4.6 kg | 10.141 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

